

Open the box. Fit it in thirty minutes.

Installation guide · TruVisia T2 dashcam

Road-facing HD video, an Event Button, and a free app.
Everything you need is in the box.

Three power options

No subscription to record



Get set up.

Six steps from a sealed box to a camera that's fitted, powered, and recording.
Allow 15 to 30 minutes; longer if you're hiding the cable behind the trim.

1

Pick your cable.

Pick the one that suits your car: OBD-II, hardwire, or 12V DC (if ordered).

2

Stick it on the glass.

Behind the rear-view mirror, passenger's side, inside the area the wipers clear. Check the live view first.

3

Pair the app.

Download the app, join the camera's Wi-Fi, and follow the prompts. About a minute.

4

Drive.

The camera records every journey. One tap on your phone gets you the clip.

What you'll need.

- The box and its contents. The serial number is on the box and on the label on the camera.
- A phone running iOS 15 or later, or Android 10 or later.
- The free TruVisia Plus app.
- Power to the vehicle. The camera has to be on to connect.
- Wi-Fi or mobile data, only needed to upload to the cloud.

What's in this guide.

1. What's in the box
2. Your camera at a glance
3. Get the free app
4. Choose your power option
5. Power it up and connect the view
6. Mount, angle, and tidy the cable

Before you stick anything down.

Clip the camera onto the bracket and check the live view against the glass before you peel the pad. It's the easiest way to get the angle right first time.

1. What's in the box.

Lay everything out before you start. Cables will differ depending on the power option you ordered.



1. Dash camera

Clips into the bracket, which sticks to the glass with a 3M pad.



2. OBD-II power cable*

Joins the extension cable. Swap for hardwire or 12V DC if that's your choice.



3. Extension cable

Runs from the camera down the A-pillar to the power source.



4. Card-slot cover + screw

The memory card should already be in the slot. Check it's pushed fully home.



5. Windscreen bracket

Sticks to clean, dry glass. Holds the camera.



6. Screwdriver

For the card-cover screw and the bracket screws.



7. Long screw

Locks the camera angle once you've aimed it.

8. Alcohol wipe

For cleaning the glass before the bracket goes on. Check it's in the box before you start.



*A hardwire cable is also in the box. A 12V DC plug-and-play cable may be supplied instead, depending on the option you ordered.

Anything missing or damaged?

Get in touch at [truvisia.com/contactus](https://www.truvisia.com/contactus) before you start the install. Have your order number and the serial number from the box label to hand.

2. Your camera at a glance.

The numbers on the photos match the list underneath.

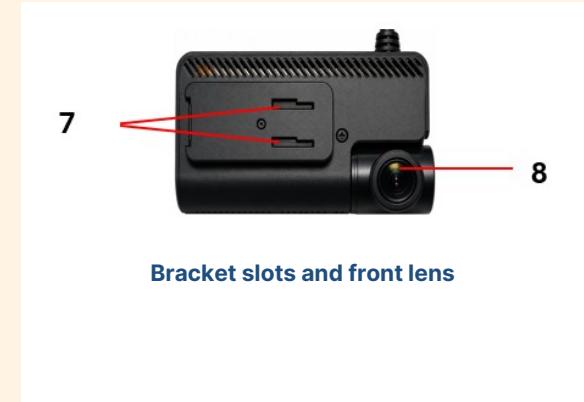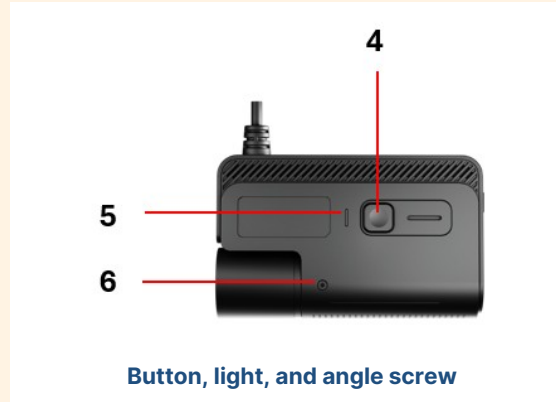

- 1 Memory (microSD) card slot
- 2 Short-screw hole: fixes the bracket
- 3 Short-screw hole: fixes the card cover
- 4 Event button (panic alarm)
- 5 Status light (LED)
- 6 Long-screw hole: sets the camera angle
- 7 Bracket slots
- 8 Front camera lens

What the light means.

White: starting up, or powered but not recording.

Blue: recording.

Red: Event Button pressed, or shutting down.

3. Get the free app.

Search for 'TruVisia Plus' in your app store or scan the QR code below with the phone you'll use with the camera.



Android

Google Play



iPhone

App Store

Allow these permissions.

Tap Allow for each one on first launch.

Permission	Why the app needs it
Camera	Scanning QR codes and identifying devices
Storage	Saving and managing recordings and app data
Location	Location information for your recordings
Network	Connecting to the camera and syncing data
Local Network (iPhone)	Talking to the camera over its Wi-Fi. Without it the app can't see the camera

The app also asks you to accept the Terms and Conditions and the Privacy Policy. Tap each link to read them, then tick the box. Acceptance is required to use the app.

Minimum requirements.

iOS 15 or later, or Android 10 or later. Phones only.

4. Choose your power option.

There are three ways to power the camera. Pick the one that suits your car, then connect the camera to the extension cable first.

Option	Best for	How it connects	Time
OBD-II plug and play	Quick installs; cars with an accessible OBD-II port	Plugs into the car's diagnostic port, usually under the dash on the driver's side, sometimes behind a cover. Find it before you start.	15–20 min
12V DC socket plug and play	Accessory or lighter socket; non-permanent installs	Plugs straight into the 12V DC accessory socket	10–15 min
Hardwire to the fuse box	A permanent, hidden install; best fitted by a professional	Fuse tap and earth in the fuse box	45–60 min



OBD-II port, usually in driver's footwell



12V DC accessory socket



Hardwire behind the trim

Mind the airbags.

Routing the cable into the headlining or the A-pillars? Keep it well clear of the vehicle's airbags.

Use an ignition-switched supply.

Pick a socket or fuse that switches off with the engine. On OBD-II or hardwire the camera records for about 15 minutes after you switch off, and an hour more in parking mode if Data Sync is on.

5. Power it up and connect the view.

Switch the ignition on; the engine doesn't need to be running. The camera turns on and the status light tells you what it's doing.

First power-on.

Light	What it means
White	Starting up, just powered on
Blue	Recording. You're all set.
Red	Event Button pressed, or shutting down


Connect to the camera's Wi-Fi.

The camera makes its own short-range Wi-Fi, about five metres, so do this from inside the car.

1. Make sure the ignition is on and your phone's Wi-Fi is enabled.
2. In the TruVisia app, tap **Connect Dashcam to Wi-Fi**.
3. Choose the network named **DASHCAM_** followed by your camera's Device ID.
4. Enter the password: your camera's **serial number**, printed on the label and on the box.
5. "Connected, no internet" is normal. Your phone is talking to the camera, not the internet. Go back to the app.



The password is the serial number on the label

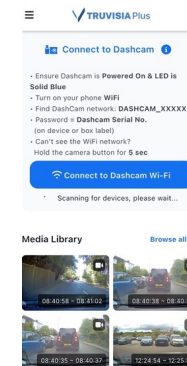

Connected: the app home screen

If your phone jumps back to Wi-Fi settings.

That's expected the first time. Once it is connected, go back to the TruVisia app. The video panel appears with Live Video, Playback, and Settings.

6. Mount, angle, and tidy the cable.

1. Check the card is firmly in the microSD slot (not SIM).
2. Wipe the spot with the alcohol wipe and let it dry.
3. Peel the film from the pad, press the bracket firmly onto the glass, and hold for 30 seconds.
4. Peel the blue film off the lens, click the camera onto the bracket, fit the card cover, and tighten the bracket screw.
5. Match the angle to the live view and lock it with the long screw. **Don't over-tighten.**
6. Tuck the cable into the headlining and down the A-pillar, clear of the pedals. Cable tidies from any online shop help.

You're set up.

A blue light means you're recording. Open the app to watch live and save the clips that matter.



Mount centrally, behind the mirror



Leave room to reach the screw



Tuck it into the headlining



Run it down the A-pillar

Where to put it.

- Passenger side, behind the mirror, top of the wipers' range.
- Close enough to reach the Event Button without stretching.
- Leave a gap to the mirror so you can reach the angle screw.
- Out of your eyeline. It must not block your view of the road.

For a clean bond.

The pad is 3M automotive adhesive. The glass must be clean, dry, and at room temperature. Don't fit it in extreme cold.

Not confident fitting it yourself?

We recommend a professional install. Our recommended installer is Auto Windscreens.



Drive smarter.

Drive safer.

Drive with proof.

Need a hand?

truvisia.com/contactus

Help with setup, the app, or your order.

Warranty

12 months from purchase

Keep your receipt and the box label.

truvisia.com

TruVisia is a trading name of VisionTrack Limited, registered in England & Wales, company no. 03350417.

Registered office: 45 Westerham Road, Bessels Green, Sevenoaks, Kent, TN13 2QB. VAT no. 110349850.

© Copyright VisionTrack Limited 2026. All rights reserved.